


Imperial [IP] Dimensions
Metric (SI) in Parentheses

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com

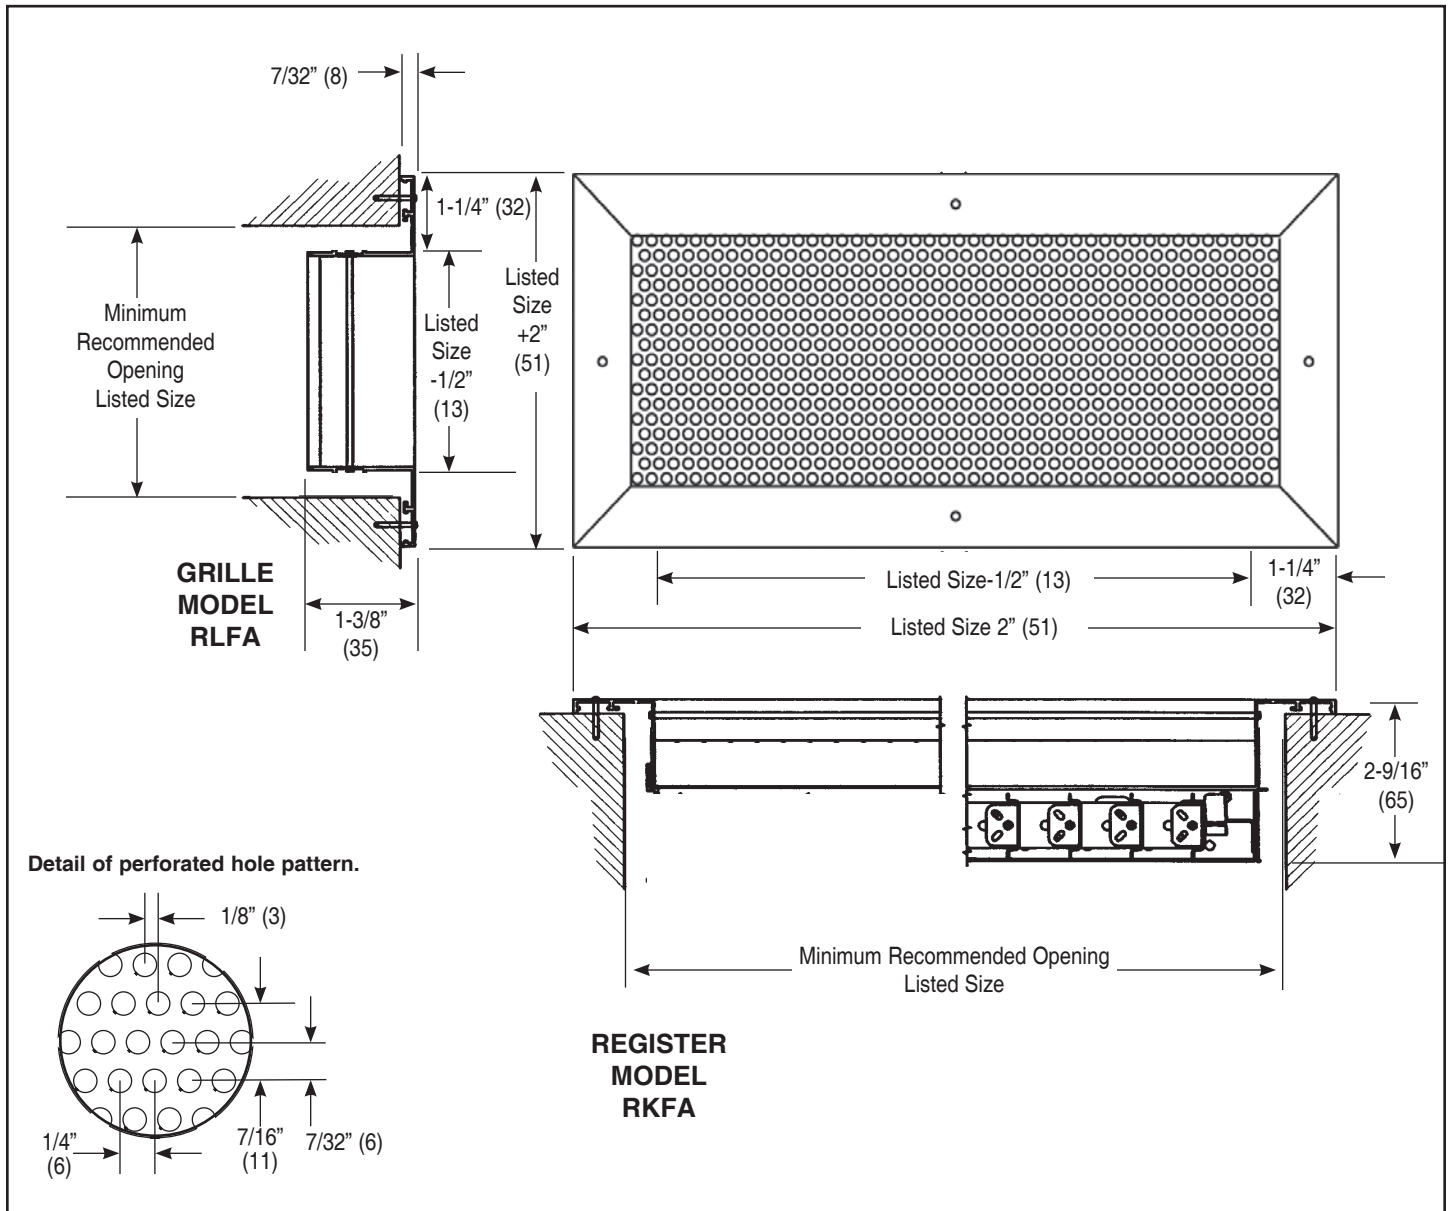

NOTES:

- Standard screws are #6 x 1-1/4" (32) phillips countersunk screws.
- Standard color is Carnes Bright White. Other colors are available on request.
- Perforated material is approximately 51% free area.
- Standard sizing is in even inch increments in both dimensions. Odd inch and fractional sizing [in 1/8" (3) increments] is available on request.
- Stainless steel damper is model RXTA opposed blade damper.
- The standard operator on the damper takes a medium size flat-blade screwdriver.
- Metric dimensions are given in millimeters.
- For lay-in applications, order module size -2-1/4" (i.e. for a 24 x 24 grid, order 21-3/4 x 21-3/4). Use option N for no screw holes.

DIMENSIONS LISTED IN INCHES (In Millimeters)

Model	Damper	Front Direction	Available Sizes*	
			Minimum W x H	Maximum W x H
RLFA	None	Horizontal	6x4 (152x102)	36x36 (914x914)
RLFA	None	Vertical	6x4 (152x102)	36x36 (914x914)
RKFA	Aluminum	Horizontal	6x4 (152x102)	36x36 (914x914)
RKFA	Aluminum	Vertical	6x4 (152x102)	36x36 (914x914)

*** Minimum and maximum single units sizes.**

Larger sizes will be furnished by butting single units together. All butted units will be constructed of even inch sized panels unless otherwise specified. Maximum damper will be 36" x 24". Larger units will have multiple dampers.