


Imperial [IP] Dimensions
Metric (SI) in Parentheses

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com

Grille Model RLDB

Register Model RKDB

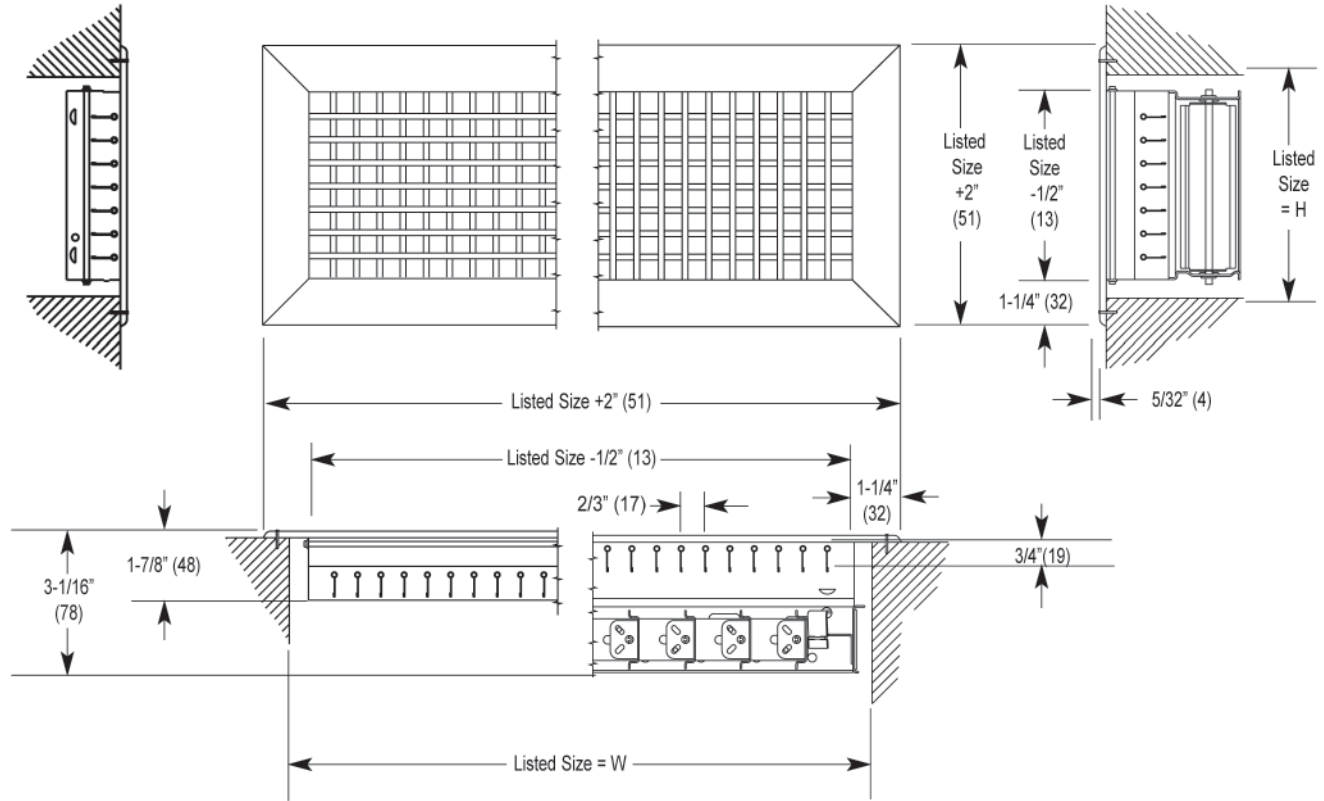

Notes:

1. Standard screws are #6 x 1-1/4" (32) phillips trusshead screws.
2. Polyurethane foam gasket around edge of frame is standard.
3. The standard finish is #22 Satin Polish with one coat of clear lacquer. Other finishes available on request.
4. Blades can be aligned either horizontally or vertically, and are individually adjustable.
5. Center mullion is used for blade lengths exceeding 24" (610) nominal size in either dimension.
6. Standard sizing is in even inch increments in both dimensions. Odd inch and fractional sizing [in 1/8" (3) increments] is available on request.
7. This product is covered by U.S. Patent #5,771,647.
8. Grille construction is type 304 stainless steel.
9. Damper construction on Model RKDB is all 304 stainless steel.
10. The standard operator on the damper takes a medium size flat-blade screwdriver.
11. Maximum size shown is the maximum single panel size. Panels can be joined for larger sizes.
12. Metric dimensions are given in millimeters.

Model	Construction	Damper	Front Blade Alignment	Minimum W x H	Maximum W x H
RLDBH	Stainless Steel	No	Horizontal	4" x 4" (102 x 102)	36" x 36" (914 x 914)
RLDBV		No	Vertical		
RKDBH		Stainless Steel	Horizontal		
RKDBV		Stainless Steel	Vertical		