


## Adjustable Plenum Slot Diffuser To Fit Donn® Finline® - Type Ceiling

Imperial [IP] Dimensions  
Metric (SI) in Parentheses

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com

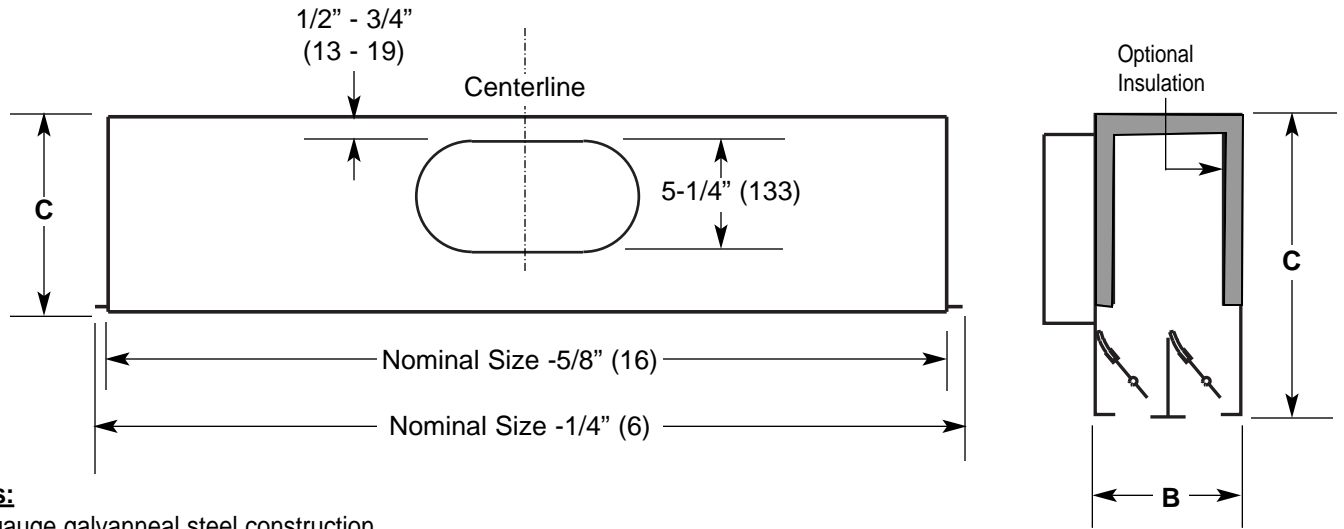

**Notes:**

- 24 gauge galvanized steel construction.
- Face of unit is painted #06 Flat Black as standard, with White Tee's.
- For surface mounting use model KXFBA Auxiliary Mounting Frame.
- Metric (SI) dimensions are shown in millimeters.
- Aluminum deflectors pivot individually on axle to alter blow pattern and discharge angle.
- Felt seal at top of deflector prevents air leakage.
- When specified, insulation is 1/2", 2-pound density matte-finish fiberglass, internally mounted.
- "Donn" and "Finline" are registered trademarks of USG, Inc.

	Diffuser Width (Dimension B)		
	Slot Width (Dimension A)		
	3/4" (19)	1" (25)	1-1/2" (38)
1-Slot	1-3/4" (44)	2" (51)	2-1/2" (64)
2-Slot	3-1/2" (89)	4" (102)	5" (127)
3-Slot	5-1/4" (133)	6" (152)	7-1/2" (191)
4-Slot	7" (178)	8" (203)	10" (254)

**4N Length**  
Cross Notch on 48" (1219) length allows 4-foot unit to lay into 24"x24" (610x610) grids.

Cross Tee

**Optional Inlet Damper**

**Detail of End Attachment**

Slot Qty	Nom. Neck Sizes	(Dim C)
1-Slot	6", 8" 10"	9" (229)
	12"	11" (279)
2-Slot	6", 8", 10"	9" (229)
	12"	11" (279)
3-Slot	6", 8", 10", 12"	11 (279)
4-Slot	6", 8", 10", 12"	11 (279)

**1-Slot**

**2-Slot**

- Center Tee is included.
- Tee is 15/16" flat-face.

**3-Slot**

- Center Tee is included.
- Tee is 15/16" flat-face.

**4-Slot**

- Center Tee is included.
- Tee is 15/16" flat-face.