

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6470 www.carnes.com

Model PMAB and PLAB Standard Specifications

Blades: 6063-T6 extruded aluminum with .081" (2.1 mm) thickness. All units incorporate hidden mullions at 60" (1219 mm) centers for blade support.

Roof: Fabricated at .050" (1.3 mm) thickness 3003-H14 formed aluminum, roof is secured with sheet metal screws for ease in removal. Flat roofs are cross broken for adequate element run-off. Models with pitched roofs have a 1" in 12" or 3" in 12" (25.4mm in 305mm or 76mm in 305mm) pitch.

Internal Framing: 1-1/2" x 1-1/2" x 1/8" (38 mm x 38 mm) framing angles of 6063-T6 extruded aluminum on 48" (1219 mm) maximum centers

Finish: all aluminum mill finish for low maintenance and resistance to corrosion





Screen: 3/4" x .051" flattened aluminum bird screen

Sizing: Order size is actual throat dimensions. Throat is undercut 1/4" (6 mm) in both "A" and "B" dimensions for installation allowance.

Minimum: 12"w x 12"L x 10"h (305 mm x 305 mm x 254 mm)

Maximum: 72"w x 220"L x 80"h (1829 mm x 5588 mm x 2032 mm).

Unlimited size with multiple section assembly.

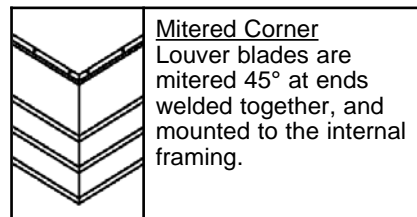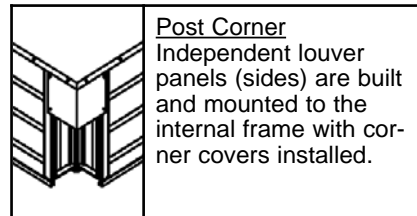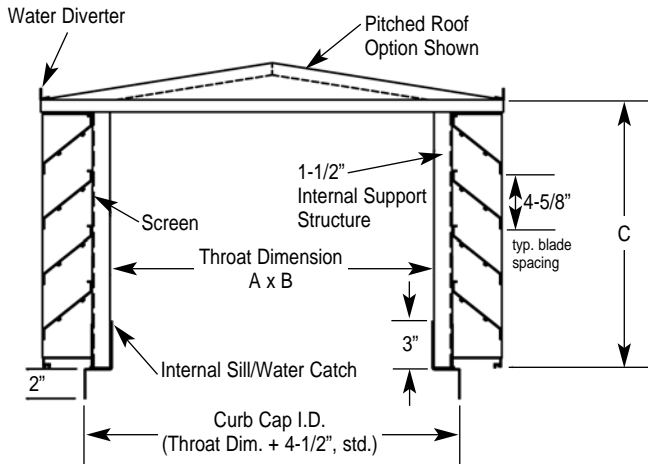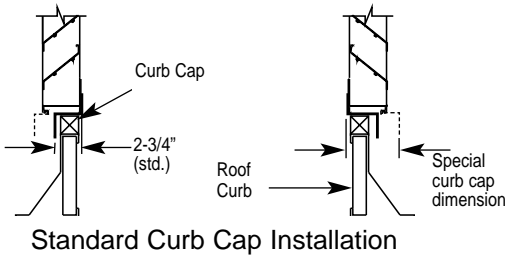

| Tag | Qty. | Size | | | Variations |
|-----|------|-------|--------|--------|------------|
| | | Width | Length | Height | |
| | | | | | |
| | | | | | |
| | | | | | |

Project
Arch./Engr.
Representative

Location
Contractor
Date

Model PMAB and PLAB

Free Area in Square Feet

| HEIGHT INCHES | WIDTH IN INCHES | | | | | | | | | | | | | | | | | | |
|------------------|-----------------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 12 | 18 | 24 | 30 | 36 | 42 | 48 | 54 | 60 | 66 | 72 | 78 | 84 | 90 | 96 | 102 | 108 | 114 | 120 |
| 12 | 0.19 | 0.31 | 0.43 | 0.54 | 0.66 | 0.78 | 0.89 | 1.01 | 1.13 | 1.24 | 1.36 | 1.48 | 1.59 | 1.71 | 1.83 | 1.94 | 2.06 | 2.18 | 2.29 |
| 18 | 0.50 | 0.80 | 1.10 | 1.41 | 1.71 | 2.01 | 2.31 | 2.62 | 2.92 | 3.22 | 3.53 | 3.83 | 4.13 | 4.43 | 4.74 | 5.04 | 5.34 | 5.65 | 5.95 |
| 24 | 0.77 | 1.23 | 1.70 | 2.16 | 2.63 | 3.09 | 3.56 | 4.02 | 4.49 | 4.96 | 5.42 | 5.89 | 6.35 | 6.82 | 7.28 | 7.75 | 8.21 | 8.68 | 9.14 |
| 30 | 0.96 | 1.54 | 2.13 | 2.71 | 3.30 | 3.88 | 4.46 | 5.05 | 5.63 | 6.22 | 6.80 | 7.38 | 7.97 | 8.55 | 9.13 | 9.72 | 10.30 | 10.89 | 11.47 |
| 36 | 1.15 | 1.85 | 2.55 | 3.25 | 3.96 | 4.66 | 5.36 | 6.06 | 6.76 | 7.46 | 8.16 | 8.86 | 9.56 | 10.26 | 10.96 | 11.66 | 12.36 | 13.06 | 13.76 |
| 42 | 1.43 | 2.29 | 3.16 | 4.02 | 4.89 | 5.76 | 6.62 | 7.49 | 8.36 | 9.22 | 10.09 | 10.95 | 11.82 | 12.69 | 13.55 | 14.42 | 15.29 | 16.15 | 17.02 |
| 48 | 1.61 | 2.59 | 3.57 | 4.55 | 5.53 | 6.51 | 7.49 | 8.47 | 9.45 | 10.43 | 11.41 | 12.39 | 13.37 | 14.35 | 15.33 | 16.31 | 17.29 | 18.27 | 19.25 |
| 54 | 1.92 | 3.09 | 4.26 | 5.42 | 6.59 | 7.76 | 8.93 | 10.10 | 11.26 | 12.43 | 13.60 | 14.77 | 15.93 | 17.10 | 18.27 | 19.44 | 20.61 | 21.77 | 22.94 |
| 60 | 2.11 | 3.40 | 4.68 | 5.97 | 7.25 | 8.54 | 9.82 | 11.11 | 12.39 | 13.67 | 14.96 | 16.24 | 17.53 | 18.81 | 20.10 | 21.38 | 22.67 | 23.95 | 25.23 |
| 66 | 2.35 | 3.78 | 5.21 | 6.64 | 8.07 | 9.50 | 10.93 | 12.36 | 13.79 | 15.22 | 16.65 | 18.08 | 19.51 | 20.94 | 22.37 | 23.80 | 25.23 | 26.66 | 28.09 |
| 72 | 2.81 | 4.52 | 6.23 | 7.94 | 9.65 | 11.36 | 13.07 | 14.78 | 16.49 | 18.20 | 19.90 | 21.61 | 23.32 | 25.03 | 26.74 | 28.45 | 30.16 | 31.87 | 33.58 |
| 78 | 2.88 | 4.63 | 6.39 | 8.14 | 9.89 | 11.64 | 13.39 | 15.14 | 16.90 | 18.65 | 20.40 | 22.15 | 23.90 | 25.65 | 27.40 | 29.16 | 30.91 | 32.66 | 34.41 |
| 84 | 3.07 | 4.94 | 6.81 | 8.68 | 10.55 | 12.42 | 14.28 | 16.15 | 18.02 | 19.89 | 21.76 | 23.63 | 25.49 | 27.36 | 29.23 | 31.10 | 32.97 | 34.84 | 36.70 |
| 90 | 3.28 | 5.27 | 7.27 | 9.26 | 11.25 | 13.25 | 15.24 | 17.23 | 19.23 | 21.22 | 23.21 | 25.21 | 27.20 | 29.19 | 31.18 | 33.18 | 35.17 | 37.16 | 39.16 |
| 96 | 3.55 | 5.70 | 7.86 | 10.02 | 12.17 | 14.33 | 16.48 | 18.64 | 20.80 | 22.95 | 25.11 | 27.26 | 29.42 | 31.57 | 33.73 | 35.89 | 38.04 | 40.20 | 42.35 |
| 102 | 3.82 | 6.13 | 8.45 | 10.77 | 13.09 | 15.41 | 17.73 | 20.05 | 22.36 | 24.68 | 27.00 | 29.32 | 31.64 | 33.96 | 36.28 | 38.59 | 40.91 | 43.23 | 45.55 |
| 108 | 3.96 | 6.37 | 8.78 | 11.19 | 13.60 | 16.01 | 18.42 | 20.82 | 23.23 | 25.64 | 28.05 | 30.46 | 32.87 | 35.28 | 37.68 | 40.09 | 42.50 | 44.91 | 47.32 |
| 114 | 4.24 | 6.81 | 9.38 | 11.96 | 14.53 | 17.10 | 19.68 | 22.25 | 24.82 | 27.40 | 29.97 | 32.54 | 35.12 | 37.69 | 40.26 | 42.84 | 45.41 | 47.98 | 50.56 |
| 120 | 4.28 | 6.89 | 9.49 | 12.09 | 14.69 | 17.30 | 19.90 | 22.50 | 25.10 | 27.71 | 30.31 | 32.91 | 35.51 | 38.12 | 40.72 | 43.32 | 45.92 | 48.53 | 51.13 |

PLAB and PMAB Selection and Examples

Example 1:

Airflow given as 10,000 cfm – select four louver sides

A. $10,000 \text{ cfm} \div 4 \text{ louver sides} = 2,500 \text{ cfm per side}$

B. $2,500 \text{ cfm} \div 812 \text{ fpm} = 3.08 \text{ ft}^2 \text{ (F.A.) per side}$

C. Select louver from the above free area chart

$42''\text{w} \times 24''\text{h} = 3.09 \text{ ft}^2 \text{ (F.A.)}$

$3.09 \text{ ft}^2 \times 4 \text{ sides} = 12.36 \text{ ft}^2 \text{ total}$

Example 2:

To select "rectangular" shape in lieu of square

A. Simply break down 12.36 ft^2

$4 + 4 + 2 + 2 = 12 \text{ ft}^2$

B. Select louver from above free area chart

$2 \text{ ft}^2 = 42'' \times 18''$

$4 \text{ ft}^2 = 82'' \times 18''$

Penthouse size $82''\text{w} \times 42''\text{l} \times 18''\text{h}$

Model PMAB and PLAB

Performance Data (CFM)

| Length + Width (A + B) | Height (Tiers) | Free Area Velocity / Pressure Drop - Intake (fpm/in. of w.g.) | | | | | | | | |
|------------------------|----------------|---|----------|----------|----------|-----------|----------|----------|----------|-----------|
| | | 200/.050 | 300/.065 | 400/.080 | 500/.095 | *600/.120 | 700/.150 | 800/.170 | 900/.210 | 1000/.270 |
| 24 | 16" (3) | 400 | 600 | 800 | 1,000 | 1,225 | 1,425 | 1,625 | 1,825 | 2,025 |
| | 20-1/2" (4) | 625 | 950 | 1,275 | 1,600 | 1,900 | 2,225 | 2,560 | 2,875 | 3,200 |
| 36 | 16" (3) | 600 | 900 | 1,200 | 1,520 | 1,825 | 2,125 | 2,425 | 2,725 | 3,025 |
| | 20-1/2" (4) | 925 | 1,375 | 1,850 | 2,300 | 2,775 | 3,225 | 3,700 | 4,175 | 4,625 |
| 48 | 16" (3) | 775 | 1,175 | 1,575 | 1,975 | 2,375 | 2,750 | 3,150 | 3,550 | 3,950 |
| | 20-1/2" (4) | 1,200 | 1,825 | 2,425 | 3,050 | 3,650 | 4,275 | 4,875 | 5,500 | 6,100 |
| | 25-1/4" (5) | 1,600 | 2,400 | 3,225 | 4,025 | 4,825 | 5,650 | 6,450 | 7,250 | 8,075 |
| 60 | 16" (3) | 975 | 1,475 | 1,975 | 2,475 | 2,975 | 3,450 | 3,950 | 4,450 | 4,950 |
| | 20-1/2" (4) | 1,500 | 2,275 | 3,025 | 3,800 | 4,550 | 5,300 | 6,075 | 6,825 | 7,600 |
| | 25-1/4" (5) | 2,000 | 3,000 | 4,000 | 5,000 | 6,000 | 7,000 | 8,000 | 9,000 | 10,000 |
| | 29-3/4" (6) | 2,375 | 3,575 | 4,750 | 5,950 | 7,150 | 8,325 | 9,525 | 10,725 | 11,900 |
| | 34-1/2" (7) | 2,725 | 4,100 | 5,475 | 6,850 | 8,225 | 9,600 | 10,975 | 12,325 | 13,700 |
| 72 | 20-1/2" (4) | 1,800 | 2,700 | 3,625 | 4,525 | 5,425 | 6,350 | 7,250 | 8,150 | 9,075 |
| | 25-1/4" (5) | 2,400 | 3,600 | 4,800 | 6,000 | 7,200 | 8,400 | 9,600 | 10,800 | 12,000 |
| | 29-3/4" (6) | 2,825 | 4,250 | 5,700 | 7,100 | 8,525 | 9,950 | 11,350 | 12,800 | 14,200 |
| | 34-1/2" (7) | 3,275 | 4,925 | 6,575 | 8,225 | 9,875 | 11,525 | 13,175 | 14,825 | 16,475 |
| | 39" (8) | 3,825 | 5,750 | 7,700 | 9,600 | 11,525 | 13,450 | 15,375 | 17,300 | 19,225 |
| 84 | 25-1/4" (5) | 2,775 | 4,175 | 5,575 | 6,975 | 8,375 | 9,750 | 11,150 | 12,550 | 13,950 |
| | 29-3/4" (6) | 3,300 | 4,950 | 6,600 | 8,250 | 9,900 | 11,550 | 13,200 | 14,850 | 16,500 |
| | 34-1/2" (7) | 3,828 | 5,725 | 7,650 | 9,575 | 11,500 | 13,400 | 15,325 | 17,225 | 19,150 |
| | 39" (8) | 4,475 | 6,700 | 8,950 | 11,200 | 13,425 | 15,675 | 17,900 | 20,150 | 22,400 |
| | 43-5/8" (9) | 5,125 | 7,675 | 10,250 | 12,800 | 15,375 | 17,925 | 20,500 | 23,075 | 25,625 |
| 96 | 25-1/4" (5) | 3,175 | 4,775 | 6,350 | 7,950 | 9,550 | 11,100 | 12,725 | 14,300 | 15,900 |
| | 29-3/4" (6) | 3,750 | 5,650 | 7,525 | 9,400 | 11,300 | 13,175 | 15,050 | 16,950 | 18,000 |
| | 34-1/2" (7) | 4,350 | 6,550 | 8,725 | 10,900 | 13,100 | 15,275 | 17,450 | 19,650 | 21,800 |
| | 39" (8) | 5,100 | 7,650 | 10,200 | 12,750 | 15,300 | 17,850 | 20,400 | 22,950 | 25,500 |
| | 43-5/8" (9) | 5,825 | 8,750 | 11,675 | 14,600 | 17,500 | 20,425 | 23,350 | 26,275 | 29,200 |
| 120 | 48-3/8" (10) | 6,425 | 9,650 | 12,875 | 16,100 | 19,300 | 22,550 | 25,775 | 29,000 | 32,200 |
| | 25-1/4" (5) | 3,950 | 5,950 | 7,925 | 9,900 | 11,900 | 13,875 | 15,850 | 17,850 | 19,800 |
| | 29-3/4" (6) | 4,700 | 7,025 | 9,375 | 11,725 | 14,075 | 16,425 | 18,775 | 21,100 | 23,475 |
| | 34-1/2" (7) | 5,425 | 8,150 | 10,875 | 13,600 | 16,300 | 19,000 | 21,750 | 24,450 | 27,200 |
| | 39" (8) | 6,350 | 9,525 | 12,700 | 15,900 | 19,075 | 22,250 | 25,400 | 28,600 | 31,800 |
| 120 | 43-5/8" (9) | 7,275 | 10,900 | 14,550 | 18,200 | 21,825 | 25,475 | 29,100 | 32,750 | 36,400 |
| | 48-3/8" (10) | 8,025 | 12,025 | 16,050 | 20,075 | 24,075 | 28,100 | 32,100 | 36,100 | 40,150 |

*Maximum recommended free area intake velocity.

See catalog product page for construction details.

Performance Caution: Wind driven rain conditions could cause some water to penetrate through the louver blades. Louvered penthouses are reasonably weather tight. However, they are not recommended for use where airborne water droplets from storms or high winds may damage the interior of the building. Provisions should always be made for potential wind driven rain or snow carry over because air can pass completely through a louvered penthouse.

Model PMAB and PLAB

Performance Data (CFM)

| Length + Width (A + B) | Height (Tiers) | Free Area Velocity / Pressure Drop - Intake (fpm/in. of w.g.) | | | | | | | | |
|------------------------|----------------|---|----------|----------|----------|-----------|----------|----------|----------|-----------|
| | | 200/.050 | 300/.065 | 400/.080 | 500/.095 | *600/.120 | 700/.150 | 800/.170 | 900/.210 | 1000/.270 |
| 144 | 29-3/4" (6) | 5,600 | 8,425 | 11,225 | 14,000 | 16,825 | 19,650 | 22,450 | 25,250 | 28,000 |
| | 34-1/2" (7) | 6,500 | 9,750 | 13,000 | 16,275 | 19,525 | 22,775 | 26,000 | 29,300 | 32,500 |
| | 39" (8) | 7,600 | 11,400 | 15,200 | 19,000 | 22,800 | 26,600 | 30,400 | 34,200 | 38,000 |
| | 43-5/8" (9) | 8,700 | 13,050 | 17,400 | 21,775 | 26,100 | 30,475 | 34,825 | 39,200 | 43,500 |
| | 48-3/8" (10) | 9,600 | 14,400 | 19,200 | 24,000 | 28,825 | 33,650 | 38,450 | 43,250 | 48,000 |
| | 53" (11) | 11,000 | 16,550 | 22,000 | 27,600 | 33,100 | 38,600 | 44,100 | 49,675 | 55,200 |
| | 57-1/2" (12) | 12,000 | 18,000 | 24,000 | 30,000 | 36,000 | 42,000 | 48,025 | 54,025 | 60,000 |
| 192 | 39" (8) | 10,100 | 15,175 | 20,225 | 25,275 | 30,350 | 35,375 | 40,400 | 45,500 | 50,500 |
| | 43-5/8" (9) | 11,575 | 17,375 | 23,150 | 28,950 | 34,750 | 40,550 | 46,325 | 52,125 | 57,900 |
| | 48-3/8" (10) | 12,800 | 19,200 | 25,600 | 32,000 | 38,400 | 44,800 | 51,200 | 57,600 | 64,000 |
| | 53" (11) | 14,650 | 22,000 | 29,300 | 36,600 | 44,000 | 51,300 | 58,650 | 66,000 | 73,600 |
| | 57-1/2" (12) | 15,700 | 23,600 | 31,400 | 39,300 | 47,200 | 55,000 | 62,900 | 70,800 | 78,600 |
| | 62-1/4" (13) | 17,250 | 25,900 | 34,500 | 43,100 | 51,800 | 60,400 | 69,000 | 77,700 | 86,300 |
| | 66-3/4" (14) | 18,800 | 28,300 | 37,700 | 47,200 | 56,600 | 66,000 | 75,500 | 84,900 | 94,400 |
| 216 | 39" (8) | 11,350 | 17,050 | 22,700 | 28,400 | 34,100 | 39,750 | 45,400 | 51,100 | 56,800 |
| | 43-5/8" (9) | 13,000 | 19,500 | 26,000 | 32,550 | 39,000 | 45,550 | 52,075 | 58,575 | 65,100 |
| | 48-3/8" (10) | 14,360 | 21,500 | 28,700 | 35,900 | 43,000 | 50,250 | 57,400 | 64,600 | 71,800 |
| | 53" (11) | 16,475 | 24,700 | 32,975 | 41,200 | 49,475 | 57,700 | 65,975 | 74,200 | 82,475 |
| | 57-1/2" (12) | 17,900 | 26,900 | 35,875 | 44,850 | 53,800 | 62,775 | 71,750 | 80,700 | 89,700 |
| | 62-1/4" (13) | 19,400 | 29,000 | 38,800 | 48,500 | 58,200 | 67,900 | 77,600 | 87,300 | 97,000 |
| | 66-3/4" (14) | 21,200 | 31,875 | 42,500 | 53,150 | 63,775 | 74,400 | 85,000 | 95,675 | 106,300 |
| | 74-1/2" (15) | 25,000 | 37,575 | 50,100 | 62,600 | 75,150 | 87,700 | 100,200 | 112,750 | 125,200 |
| 240 | 48-3/8" (10) | 15,500 | 23,300 | 31,075 | 38,850 | 46,625 | 54,400 | 62,175 | 69,950 | 77,700 |
| | 53" (11) | 17,850 | 26,775 | 35,700 | 44,625 | 53,550 | 62,500 | 71,400 | 80,350 | 89,250 |
| | 57-1/2" (12) | 19,400 | 29,100 | 38,800 | 48,500 | 58,250 | 67,950 | 77,675 | 87,375 | 97,100 |
| | 62-1/4" (13) | 21,000 | 31,500 | 42,000 | 52,500 | 63,000 | 73,500 | 84,000 | 94,500 | 105,000 |
| | 66-3/4" (14) | 23,000 | 34,500 | 46,000 | 57,500 | 69,000 | 80,500 | 92,000 | 103,500 | 115,100 |
| | 74-1/2" (15) | 27,100 | 40,675 | 54,250 | 67,800 | 81,300 | 94,900 | 108,500 | 122,000 | 135,650 |

*Maximum recommended free area intake velocity.

See catalog product page for construction details.

Performance Caution: Wind driven rain conditions could cause some water to penetrate through the louver blades. Louvered penthouses are reasonably weather tight. However, they are not recommended for use where airborne water droplets from storms or high winds may damage the interior of the building. Provisions should always be made for potential wind driven rain or snow carry over because air can pass completely through a louvered penthouse.

PLAB and PMAB Example

Required cfm: 8,200 (intake), .10" w.g. (max. pressure drop), no taller than 36".

Length + Width: Select 84

Throat can be 42 x 42 (A + B) or a rectangular size such as 48 x 36 (A + B).

Select 6 tiers (29-3/4" tall) will allow up to 8,250 cfm at .095" w.g. pressure drop.