



**Imperial [IP] Dimensions
Metric (SI) in Parentheses**

CARNES COMPANY, 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone (608) 845.6411 Fax: (608) 845.6470 carnes@carnes.com

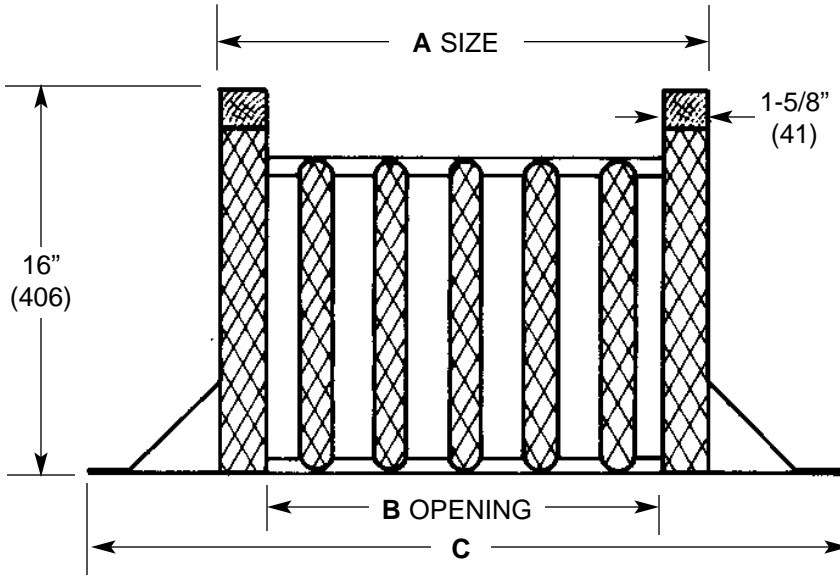

MODEL DESIGNATION

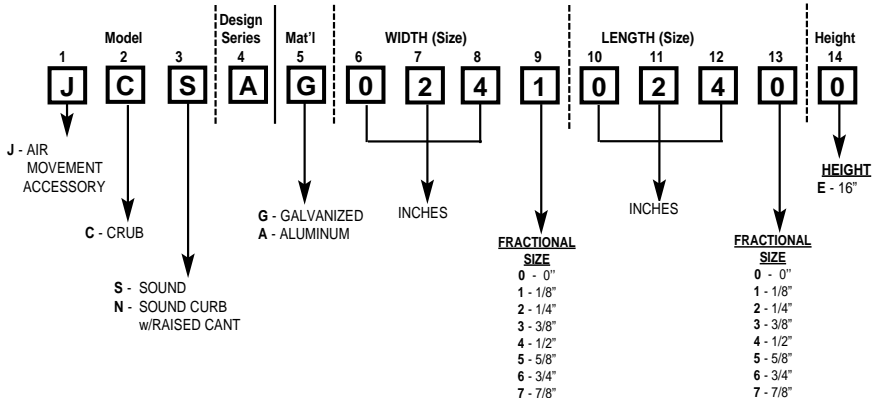

APPLICATION

Select ventilator for 4% additional CFM to overcome typical performance loss over standard curb. Catalog sone ratings will be reduced approximately 40% (.6 x catalog sones = sones with JCSA Curb).

NOTES

Backdraft dampers must be mounted in duct below curb.

STANDARD FEATURES

- 1-1/2" (38) thick 3 lb. density rigid fiberglass insulation.
- 3" x 3" (76 x 76) cant strip.
- 18 ga. (.052) galvanized steel construction.
- 1" (25) thick 3 lb. rigid insulation baffles.
- Removable baffle assembly.
- 22 Ga. galvanized baffles, 5" (127) on center.

DIMENSIONS

- "A" = Curb Cap -1-1/2" (38) - [Curb OD]
- "B" = "A" -3-1/4" (82) - [Curb ID]
- "C" = "A" +8" (203) - [Base OD]

LOCATION/ MARK	MODEL	CURB O. D.	Roof Opening CURB I. D.	HEIGHT	Notes

PROJECT:		ARCHITECT:	
CONTRACTOR:	DATE:	SUBMITTED BY:	ENGINEER