


Imperial [IP] Dimensions
Metric (SI) in Parentheses

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com

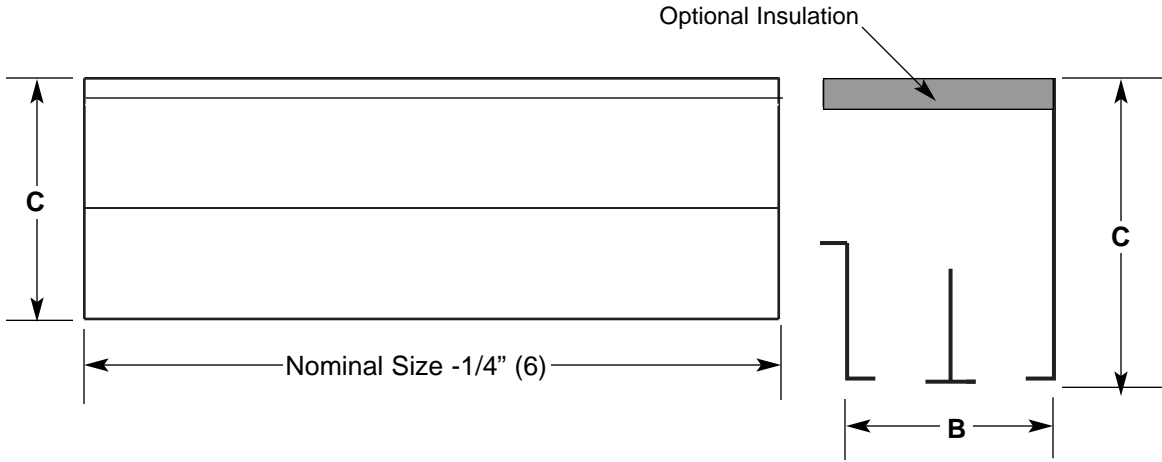


Notes:

- 24 gauge galvaneal steel construction.
- Face of unit is painted #06 Flat Black as standard, and White Tee's are #11 Bright White when supplied.
- For surface mounting use model KXFBA Auxiliary Mounting Frame.
- Metric(SI) dimensions are shown in millimeters.
- When specified, insulation is 1/2", 2-pound density matte-finish fiberglass, internally mounted.

	Diffuser Height (Dimension C)		
	Slot Width (Dimension A)		
	3/4" (19)	1" (25)	1-1/2" (38)
1-Slot	3-3/4" (95)	4" (102)	4-1/2" (114)
2-Slot	4-1/2" (114)	5" (127)	6" (152)
3-Slot	5-1/4" (133)	6" (152)	7-1/2" (191)
4-Slot	6" (152)	7" (178)	9" (229)


4N Length

Cross Notch on 48" (1219) length allows 4-foot unit to lay into 24"x24" (610x610) grids.




	Diffuser Width (Dimension B)		
	Slot Width (Dimension A)		
	3/4" (19)	1" (25)	1-1/2" (38)
1-Slot	2-1/8" (54)	2-1/4" (57)	2-3/4" (70)
2-Slot	3-3/4" (95)	4-1/4" (108)	5-1/4" (133)
3-Slot	5-1/2" (140)	6-1/4" (159)	7-3/4" (197)
4-Slot	7-1/2" (191)	8-1/4" (210)	10-1/4" (260)

1-Slot
Model DAHD




2-Slot

No Center Tee: DAHD
With Center Tee: DAVD



3-Slot

With Center Tees: DAVD



4-Slot

With Center Tees: DAVD

